arXiv:1202.3822v1 [quant-ph] 17 Feb 2012

No-signaling Quantum Key Distribution: A Straightforward Approach

Won-Young Hwang[1,2] *, Joonwoo Bae[3], and Nathan Killoran[2]
[1] *Department of Physics Education,*
Chonnam National University,
Gwangju 500-757, Republic of Korea
[2] *Institute for Quantum Computing and Department of Physics & Astronomy,*
University of Waterloo, Waterloo N2L 3G1, Canada
[3] *Centre for Quantum Technologies,*
National University of Singapore,
Singapore 117542, Singapore

We outline a straightforward approach for obtaining a secret key rate using only no-signaling constraints. Assuming an individual attack, we consider all possible joint probabilities. First we suppose temporarily that Eve (an eavesdropper) is restricted to binary outcomes. We impose constraints due to the no-signaling principle and given measurement outcomes. Within the remaining space of joint probabilities, by using convex optimization, we find the maximum mutual information $I_{BE}^{max}(2)$ between Bob (a user) and a binary-restricted Eve. Then, by considering a certain coarse graining mapping, we show how to get a bound on I_{BE}^{max}, the maximal mutual information between Bob and Eve, whose number of outcomes is not restricted, from the quantity $I_{BE}^{max}(2)$. Using the Csiszár-Körner formula and the calculated bound, we obtain the key generation rate.

PACS numbers: 03.67.Dd

I. INTRODUCTION

A nonlocal realistic model, the de Broglie-Bohm theory, is not only consistent with quantum theory but also coherently describes measurement processes including wave-function collapse [1]. This raises a question if all realistic models must be nonlocal to be consistent with quantum theory, which led to the discovery of Bell's inequality [2, 3].

Recently, the nonlocality involved with Bell's inequality and entanglement has entered a new phase of its development. It turned out that entanglement is a concrete physical resource for information processing [4]. In the same context, interestingly, it was found that with nonlocal correlations we can generate a cryptographic key, a private random shared sequence, whose security relies on only the no-signaling principle [5–7]. For this, no quantum theory is used for the security analysis. However, the only currently available way to realize nonlocal correlations is by using quantum entanglement. So these protocols are called no-signaling *quantum* key distribution (QKD). Remarkably, what is used to show security in no-signaling QKD is only the outcomes of measurements. As long as the outcomes satisfy a certain condition, security is provided, no matter how the outcomes are generated. Thus, no-signaling QKD has device-independent security. To satisfy the security condition, detector efficiency must be much higher than what is currently achievable. If detectors with that high efficiency are available, however, it is also possible that the Bennett-Brassard 84 QKD protocol [8] with decoys [9] for source imperfection and squashing [10] for detector imperfection obtains security. (See also a recent innovative proposal for a user-detector-free protocol to get security with high loss [11].)

In Refs. [6, 7], the security of no-signaling QKD is elegantly analyzed, in the case of individual attacks, by using known properties of non-signaling correlations [12, 13]. In this paper, we take a straightforward approach to no-signaling QKD with use of convex optimization. We consider a protocol proposed by Acín, Massar, and Pironio (AMP) [7]. We analyze the security of the AMP protocol [14] in the case of an individual attack. In order to make the problem feasible, first we make an assumption that Eve (an eavesdropper) is restricted to have only binary outcomes. Then we consider all possible joint probabilities compatible with a given set of measurement outcomes and the no-signaling constraint. Within the remaining space of joint probabilities, we maximize the mutual information between Bob (a user) and Eve, $I_{BE}(2)$, by convex optimization, to obtain $I_{BE}^{max}(2)$. Here 2 denotes the number of Eve's outcome. On the other hand, we prove two Propositions involving coarse graining of Eve's outcome. Using these Propositions, we derive a bound on the maximal mutual information, I_{BE}^{max}, between Bob and Eve (whose number of outcomes is unrestricted) from the quantity $I_{BE}(2)$. Then a key generation rate K is obtained by using the Csiszár-Körner formula [16] in our case, $K = I_{AB} - I_{BE}$. Here I_{AB} is the mutual information between Alice and Bob.

The key generation rate obtained here is lower than the one in Ref. [7]. This is because information loss is inevitable in the coarse graining process. However, there can be other problems for which the straightforward approach is more feasible. As well, our method to derive a bound on I_{BE}^{max} from $I_{BE}^{max}(2)$ (with some loss of information) is applicable to other cases. For example, using the value of $I_{BE}^{max}(2)$ obtained in Ref. [17] from monogamy properties, a bound on I_{BE}^{max} can be immediately obtained by our method (what can be obtained from Eve's guessing probability on Bob's outcome is not I_{BE} but $I_{BE}(2)$ [18]).

---

*Email: wyhwang@jnu.ac.kr

II. $I_{BE}^{max}(2)$ BY CONVEX OPTIMIZATION

A. AMP protocol

Two users, Alice and Bob, attempt to distribute a Bell state, $|\phi^+\rangle = (1/\sqrt{2})(|0\rangle_A|0\rangle_B + |1\rangle_A|1\rangle_B)$, where A and B denote Alice and Bob, respectively, and $|0\rangle$ and $|1\rangle$ compose an orthonormal basis of a quantum bit (qubit). To mimic a realistic case with channel noise, we assume the Bell state was transformed to a Werner state

$$\rho = p|\phi^+\rangle\langle\phi^+| + (1-p)\frac{I}{4}, \tag{1}$$

where $0 \leq p \leq 1$. Although we use the Werner state to model potential data, our method does not rely on this. For each copy of the distributed state, Alice chooses the value of an index x among $0, 1$, and 2 with probabilities q, $(1-q)/2$, and $(1-q)/2$, respectively. Then she performs a measurement M_x on her qubit. M_0 is a measurement composed of the projections $\{|+\rangle\langle+|, |-\rangle\langle-|\}$ where $|\pm\rangle = (1/\sqrt{2})(|0\rangle \pm |1\rangle)$. M_1 and M_2 are measurements composed of $\{|\pi/4\rangle\langle\pi/4|, |5\pi/4\rangle\langle 5\pi/4|\}$ and $\{|-\pi/4\rangle\langle-\pi/4|, |-5\pi/4\rangle\langle-5\pi/4|\}$, respectively. Here, $|\phi\rangle = (1/\sqrt{2})(|0\rangle + e^{i\phi}|1\rangle)$ is a state obtained by rotating the state $|+\rangle$ around the z-axis by an angle ϕ. Bob also chooses a value of his index y for each copy, either 0 or 1, with probabilities q' and $1-q'$, respectively. Then he performs a measurement N_y on his qubit. Here $N_0 = M_0$ and N_1 is composed of $\{|\pi/2\rangle\langle\pi/2|, |3\pi/2\rangle\langle 3\pi/2|\}$. Next, both Alice and Bob publicly announce their values x and y for each copy. Measurement outcomes in the case $x = y = 0$ are kept and used to generate the key. Outcomes from other cases are publicly announced to estimate Eve's information. Alice and Bob choose q and q' close to 1 so that almost events are in the case $x = y = 0$. This does not affect the security in the asymptotic case we consider.

B. Constraints on the probability distributions

We assume an individual attack in which Eve follows the same procedure for each instance. For each choice of measurements x and y by Alice and Bob, there is a joint probability for measurement outcomes a, b, e for Alice, Bob, and Eve, respectively. The joint probability for a, b, e, conditioned on measurements x and y is denoted by $P(a, b, e|x, y)$. Here, a and b are binary variables according to the protocol. The number of Eve's outcomes e should be arbitrary in principle. Let us assume, however, that Eve's outcome is binary for now.

Let us write constraints for the joint probabilities. First, they satisfy normalization

$$\sum_{a,b,e} P(a, b, e|x, y) = 1 \tag{2}$$

for each x, y. Let us denote the marginal distribution for Alice and Bob, $\sum_e P(a, b, e|x, y)$, by $P(a, b, \triangle|x, y)$.

The marginal distributions corresponding to the state in Eq. (1) should be consistent with the measurement outcomes. For the measurement basis choice $(x = 0, y = 0)$ we have

$$\begin{aligned} P(0,0,\triangle|0,0) &= P(1,1,\triangle|0,0) = \frac{p}{2} + \frac{1-p}{4}, \\ P(0,1,\triangle|0,0) &= P(1,0,\triangle|0,0) = \frac{1-p}{4}. \end{aligned} \tag{3}$$

For $(x = 0, y = 1)$, where there is no correlation,

$$P(a, b, \triangle|0, 1) = \frac{1}{4} \tag{4}$$

for each a and b. For $(x = 1, y = 0)$, $(x = 1, y = 1)$, and $(x = 2, y = 0)$,

$$\begin{aligned} P(0,0,\triangle|x,y) &= P(1,1,\triangle|x,y) \\ &= 0.854\ \frac{p}{2} + \frac{1-p}{4} \equiv \alpha \\ P(0,1,\triangle|x,y) &= P(1,0,\triangle|x,y) \\ &= 0.146\ \frac{p}{2} + \frac{1-p}{4} \equiv \beta, \end{aligned} \tag{5}$$

where the two numerical values, 0.854 and 0.146, are obtained from measurement outcomes for the Bell state. For $(x = 2, y = 1)$,

$$\begin{aligned} P(0,0,\triangle|2,1) = P(1,1,\triangle|2,1) &= \beta \\ P(0,1,\triangle|2,1) = P(1,0,\triangle|2,1) &= \alpha. \end{aligned} \tag{6}$$

Now we consider no-signaling conditions. Because the marginal distribution for Alice and Eve must be independent of Bob's basis choice,

$$P(a, \triangle, e|x, 0) = P(a, \triangle, e|x, 1) \tag{7}$$

for each x. Here we use a notation for marginal distributions analogous to the previous one. Similarly,

$$P(\triangle, b, e|0, y) = P(\triangle, b, e|1, y) = P(\triangle, b, e|2, y) \tag{8}$$

for each y. Another no-signaling constraint is that Eve's marginal distribution is independent of the basis choices of Alice and Bob,

$$P(\triangle, \triangle, e|x, y) = P(\triangle, \triangle, e|0, 0) \tag{9}$$

for each x, y.

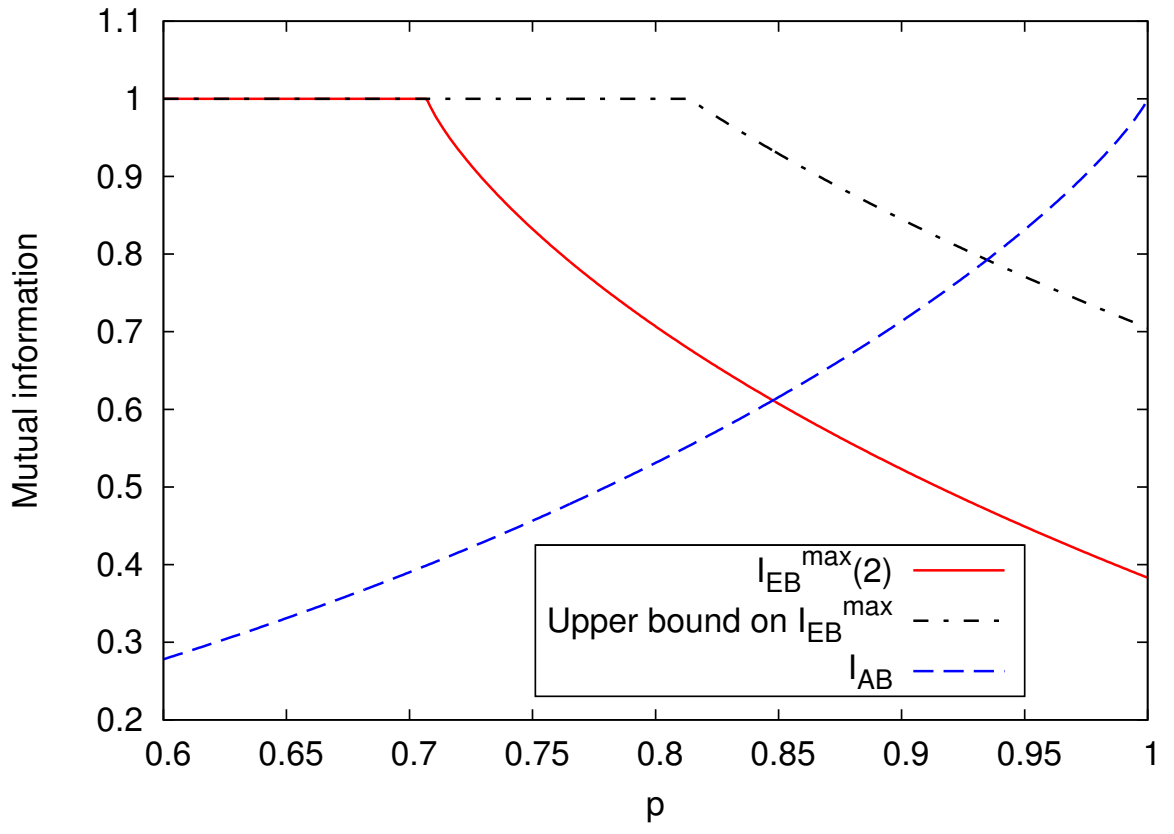

FIG. 1: Mutual informations depending on the noise parameter p. Positive key is possible in the region where $I_{BE}^{\max}$ (dash-dotted line) is smaller than I_{AB} (dashed line). This occurs for $p \gtrsim 0.936$. The max I_{BE} curve should actually go higher than 1 (it is equal to the solid $I_{BE}^{\max}(2)$ curve offset by χ), but we have truncated it at 1 for clarity. This does not affect any statements about the key since $I_{AB} \leq 1$.

C. Maximal mutual information in binary case

We maximize the mutual information, $I_{BE}(2)$, within the constraints (2)-(9) by convex optimization (see Appendix A). As we can see in Fig. 1, in the regime $p < \frac{1}{\sqrt{2}}$ where the Werner state admits a local realistic model, Eve has full information about Bob, namely $I_{BE}^{max}(2) = 1$, so there can be no secret key. However, in the regime where $\frac{1}{\sqrt{2}} \leq p \leq 1$, Eve's information is restricted. When $p = 1$, $I_{BE}^{max}(2) \simeq 0.383$ and I_{AB} is equal to 1.

III. DERIVATION OF A BOUND ON I_{BE}^{max} FROM $I_{BE}^{max}(2)$

Let us consider a joint probability, $P(i,j)$, between two parties. Here i is a binary random variable but $j \in \{0, 1, ..., N\}$, where N is arbitrary. We consider a coarse graining mapping for j in which the number of outcomes, N, is reduced to 2. The joint probability after coarse graining is denoted by $Q(i,j)$. Let us denote the mutual information due to $P(i,j)$ before coarse graining by $I(N)$, and denote the mutual information due to $Q(i,j)$ after coarse graining by $I(2)$. The coarse graining reduces the mutual information. We set the amount of reduction to be $\Delta \equiv I(N) - I(2)$.

Proposition-1: For a particular prescribed coarse graining, the information loss Δ is bounded by a certain quantity $\chi \simeq 0.322$, namely $\Delta \leq \chi$ (a description of the chosen coarse graining and the proof of the bound are given in Appendix B)

Because N is arbitrary, we can say that $I_{BE}^{max}(N) = I_{BE}^{max}$. Now, using Proposition-1, we can get a bound for I_{BE}^{max}.

Proposition-2: The maximal mutual information, I_{BE}^{max}, is bounded by the sum of the maximal mutual information in the binary case, $I_{BE}^{max}(2)$, and χ, namely $I_{BE}^{max} \leq I_{BE}^{max}(2) + \chi$.

Proof: Suppose that

$$I_{BE}^{max} > I_{BE}^{max}(2) + \chi. \tag{10}$$

Applying the prescribed coarse graining to the distribution $P(i,j)$ corresponding to I_{BE}^{max}, we get a probability distribution $Q(i,j)$ which gives another value of the binary-case mutual information, $I'_{EB}(2)$. By inequality (10) and Proposition-1, we find $I'_{EB}(2) > I_{BE}^{max}(2)$. This is a contradiction because $I_{BE}^{max}(2)$ is maximal. □

IV. DISCUSSION AND CONCLUSION

Using the Csiszár-Körner formula [16] and Proposition-2, we can get a a lower bound on the key generation rate

$$K = I_{AB} - I_{BE}^{max}(2) - \chi. \tag{11}$$

The region where we have non-zero K is $0.936 \leq p \leq 1$. The maximal K, which is obtained in noiseless case, $p = 1$, is 0.295. This is smaller than the corresponding value, 0.414, in Ref. [6]. This is because of information loss in the coarse graining. We overestimated the amount of information that Eve loses in the coarse graining. By the same reasoning, the minimal value of p for non-zero K, 0.936, is greater than the corresponding threshold in Ref. [6].

However, let us suppose that Eve is restricted to have only binary outcomes. Then we have $K = I_{AB} - I_{BE}^{max}(2)$ which gives a maximal $K = 0.617$. This exceeds the corresponding value in Ref. [6]. This is not strange because here Eve is restricted. Users can get more key for restricted Eve than for unrestricted Eve.

To summarize, we took a straightforward approach to a no-signaling QKD protocol, the AMP protocol. Assuming an individual attack, we consider all possible joint probabilities. Here we supposed temporarily that Eve's strategy is binary to reduce the dimension of the space of joint probabilities. We imposed constraints due to the no-signaling principle and measurement outcomes, which reduce the dimension of the space. By using convex optimization, we maximized Eve's information on Bob within the remaining space, to obtain $I_{BE}^{max}(2)$. Then by considering a coarse graining mapping, we showed how to get a bound on the mutual information between an unrestricted Eve and Bob, I_{BE}^{max}, from the quantity $I_{BE}^{max}(2)$. Using the Csiszár-Körner formula [16] and the bound, we got a non-zero key generation rate.

Acknowledgement

This study was supported by Basic Science Research Program through the National Research Foundation of

Korea (NRF) funded by the Ministry of Education, Science and Technology (2010-0007208), and by National Research Foundation and Ministry of Education, Singapore. NK acknowledges the Ontario Graduate Scholarship program for support.

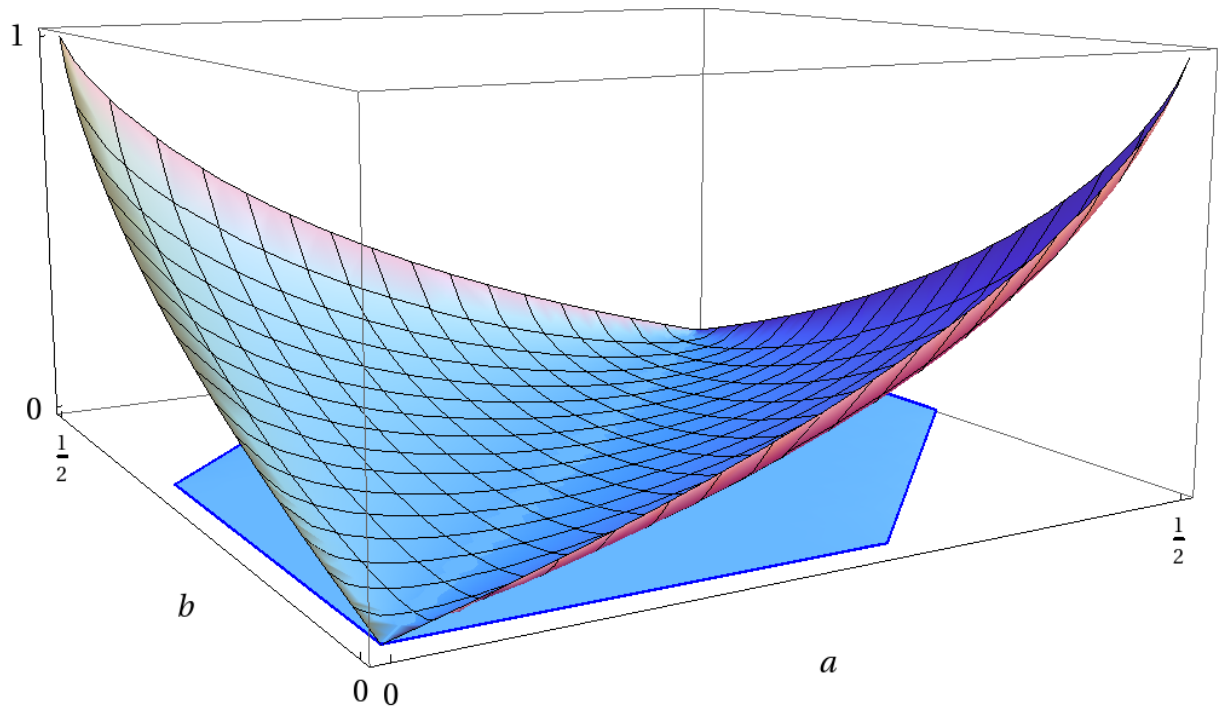

FIG. 2: $I_{BE}(2)$ is a convex function with respect to the variables $a \equiv x_0 + x_4$ and $b \equiv x_2 + x_6$ (upper surface). As well, the given constraints define a convex region (lower surface).

Appendix A: Maximizing $I_{BE}(2)$

Here we maximize the mutual information for a binary-restricted Eve, $I_{BE}(2)$, within these constraints (2)-(9) by convex optimization. For visual convenience, $P(a,b,e|x,y)$ are denoted as:

$$\begin{aligned} P(a,b,e|0,0) &= x_{abe}, \quad P(a,b,e|0,1) = y_{abe}, \\ P(a,b,e|1,0) &= z_{abe}, \quad P(a,b,e|1,1) = u_{abe}, \\ P(a,b,e|2,0) &= v_{abe}, \quad P(a,b,e|2,1) = w_{abe}. \end{aligned} \tag{A1}$$

We regard *abe* as a binary number, for example, $P(1,0,1|0,0) = x_{101} = x_5$.

Now let us rewrite the constraints regarding measurement outcomes. For Eqs. (3) and (4), we have, respectively,

$$\begin{aligned} x_0 + x_1 &= x_6 + x_7 = \frac{p}{2} + \frac{1-p}{4}, \\ x_2 + x_3 &= x_4 + x_5 = \frac{1-p}{4}, \end{aligned} \tag{A2}$$

and

$$y_0 + y_1 = y_2 + y_3 = y_4 + y_5 = y_6 + y_7 = \frac{1}{4}. \tag{A3}$$

For Eq. (5), we have

$$\begin{aligned} A_0 + A_1 &= A_6 + A_7 = \alpha \\ A_2 + A_3 &= A_4 + A_5 = \beta, \end{aligned} \tag{A4}$$

where $A = z, u, v$. For Eqs. (6), we have

$$\begin{aligned} w_0 + w_1 &= w_6 + w_7 = \beta \\ w_2 + w_3 &= w_4 + w_5 = \alpha. \end{aligned} \tag{A5}$$

We can see that Eqs. (A2)-(A5) make the normalization in Eq. (2) satisfied. Thus the normalization condition can be removed.

The no-signaling condition in Eq. (7) can be expressed as

$$\begin{aligned} x_i + x_{i+2} &= y_i + y_{i+2}, \\ z_i + z_{i+2} &= u_i + u_{i+2}, \\ v_i + v_{i+2} &= w_i + w_{i+2}, \end{aligned} \tag{A6}$$

where $i = 0,1$ and $4,5$. We can see that, by Eqs. (A2)-(A5), the case when $i = 0,4$ implies the case when $1,5$, respectively. Thus the latter cases can be removed. The no-signaling condition in Eq. (8) can be expressed as

$$\begin{aligned} x_j + x_{j+4} &= z_j + y_{j+4}, \\ z_j + z_{j+4} &= v_j + v_{j+4}, \\ y_j + y_{j+4} &= u_j + u_{j+4}, \\ u_j + u_{j+4} &= w_j + w_{j+4}, \end{aligned} \tag{A7}$$

where $j = 0,1,2,3$. We can also see that, by Eqs. (A2)-(A5), the case when $j = 0,2$ implies the case when $j = 1,3$, respectively. Thus the latter cases can be removed. We can verify that Eqs. (A6) and (A7) (or equivalently, Eqs. (7) and (8)) lead to Eq. (9), which can thus be removed. As a result, we can remove all variables B_i where $B = x, y, z, u, v, w$ and i is an odd number.

Therefore, by non-negativity of each quantity, the space in which we optimize $I_{BE}(2)$ is as follows:

$$0 \le x_k \le \frac{p}{2} + \frac{1-p}{4}, \qquad 0 \le x_l \le \frac{1-p}{4}, \tag{A8}$$

where $k = 0,6$ and $l = 2,4$,

$$0 \le y_j \le \frac{1}{4}, \tag{A9}$$

where j=0,2,4,6, and

$$\begin{aligned} 0 \le A_k \le \alpha, &\quad 0 \le A_l \le \beta, \\ 0 \le w_k \le \beta, &\quad 0 \le w_l \le \alpha, \end{aligned} \tag{A10}$$

where $A = z, u, v$ and $k = 0,6$ and $l = 2,4$. These constraints are those that remain in Eqs. (A6) and (A7) after removing odd numbered variables.

To find $I_{BE}^{max}(2)$, we use linear programming. Of course, the function $I_{BE}(2)$ is not linear, so we cannot use it directly as the objective function in a linear program. However, we will show that $I_{BE}(2)$ is a convex function in the relevant variables (see Fig. 2), which will allow us to calculate its maximum with the assistance of a linear program. Now, because the key is generated only from the results where $x = y = 0$, we need to calculate the mutual information of the joint distribution $P(\Delta, b, e|0,0) \equiv R(b,e)$. It is useful to rewrite the mutual information $I_{BE}(2)$ as a function of Eve's conditional distribution. For this, Bob's marginal distribution, which is fixed by the measurement outcomes, will be denoted as $R(b) \equiv R(b,\Delta) = \frac{1}{2}$ $(b = 0,1)$. Let

$$R(e|b) = \frac{R(b,e)}{R(b)} = 2R(b,e) \tag{A11}$$

denote the distribution of Eve's outcomes conditioned on Bob's outcomes, all in the 0 basis (this is different from elsewhere, where conditioning refers to different basis choices). Then the mutual information is given by

$$\begin{aligned} I_{BE}(2) &= \sum_{b,e} R(b)R(e|b)\log_2\left(\frac{R(e|b)}{\sum_b R(b)R(e|b)}\right)\\ &= \frac{1}{2}\sum_{b,e} R(e|b)\log_2\left(\frac{R(e|b)}{\frac{1}{2}\sum_b R(e|b)}\right) \end{aligned} \tag{A12}$$

We note the following fundamental property of the mutual information: when a marginal is fixed, the remaining function (Eq. (A12)) is convex with respect to the conditional distribution $R(e|b)$ [19]. Since the conditional probabilities $R(e|b)$ and the joint probabilities $R(b,e)$ are related by a simple linear rescaling, the mutual information $I_{BE}(2)$ is therefore a convex function of the joint probabilities $R(b,e)$. Furthermore, we can reduce the number of independent variables in the distribution $R(b,e)$ from four to two. From Eq. (A2), we have the following constraints:

$$\begin{aligned} R(0|0)+R(1|0) &= 2(x_0+x_1+x_4+x_5)=1\\ R(0|1)+R(1|1) &= 2(x_2+x_3+x_6+x_7)=1 \end{aligned} \tag{A13}$$

This corresponds to taking a two-dimensional linear slice through the ostensibly four variable function $I_{BE}(2)$. We will choose the two independent variables to be $a \equiv x_0 + x_4$ (representing correlation) and $b \equiv x_2 + x_6$ (representing anticorrelation). The final form for the mutual information is

$$I_{BE}(2) = H(B) + H(E) - H(B,E) \tag{A14}$$

with the Shannon entropies

$$\begin{aligned} H(B) &= 1\\ H(E) &= -[(a+b)\log_2(a+b)\\ &\quad +(1-(a+b))\log_2(1-(a+b))]\\ H(B,E) &= -[a\log_2 a + (\tfrac{1}{2}-a)\log_2(\tfrac{1}{2}-a)\\ &\quad +b\log_2 b + (\tfrac{1}{2}-b)\log_2(\tfrac{1}{2}-b)]. \end{aligned} \tag{A15}$$

This is a convex function over the domain $(a,b) \in [0,\frac{1}{2}]\times[0,\frac{1}{2}]$. Moreover, it is symmetric under the transformations $(a,b) \leftrightarrow (b,a)$ and $(a,b) \leftrightarrow (\frac{1}{2}-a,\frac{1}{2}-b)$.

Next, we note that the constraints (A8)-(A10) define a convex set. We define $\mathcal{C} \in [0,\frac{1}{2}]\times[0,\frac{1}{2}]$ as the projection of this set onto the (a,b)-plane. We notice that $\mathcal{C}$ is convex and is symmetric under the same transformations as $I_{BE}(2)$ given above. To maximize the convex function $I_{BE}(2)$ on the convex set $\mathcal{C}$, we need only evaluate $I_{BE}(2)$ at the extreme points of $\mathcal{C}$. Therefore, we must find the extreme points of $\mathcal{C}$. It is easy to see that choosing all even parameters (e.g. x_2, v_6, etc.) to be 0 satisfies the constraints. Therefore $(0,0)\in\mathcal{C}$. By symmetry, we must also have $(\frac{1}{2},\frac{1}{2})\in\mathcal{C}$. These two points are clearly extreme points. To find the remaining extreme points, we will use linear programming. We point out that any other method for finding the extreme points of $\mathcal{C}$ is equally valid. To this end, we consider the correlation function

$$E(a,b) = a - b. \tag{A16}$$

Since this function is linear, it is suitable to use as the objective function of a linear program. Specifically, for fixed value of the noise parameter p, we perform the following optimization:

$$E^{\max} = \begin{cases} \max & E(a,b)\\ \text{subject to} & (a,b)\in\mathcal{C}. \end{cases} \tag{A17}$$

Because E is convex, it also achieves its maximum at some extreme point of $\mathcal{C}$. In general, we should not expect $I_{BE}(2)$ and E to achieve their maximal values at the same extreme points. However, by using the simpler function E, we can deduce that the set $\mathcal{C}$ has a very simple set of extreme points. Indeed, modulo symmetry, there is only one other extreme point to find. The above linear program yields the following extreme point, for which E achieves its maximum:

$$(a_*,b_*) = \begin{cases} (\frac{1}{2},0) & p\in[0,\frac{1}{\sqrt{2}})\\ (1-\frac{p}{\sqrt{2}},0) & p\in[\frac{1}{\sqrt{2}},1] \end{cases}. \tag{A18}$$

We conclude that when $p\in[0,\frac{1}{\sqrt{2}})$, the set $\mathcal{C}$ is simply the square $[0,\frac{1}{2}]\times[0,\frac{1}{2}]$. The maximum of $I_{BE}(2)$ in this case occurs at $(\frac{1}{2},0)$ and is exactly 1. This corresponds to the parameter regime where the Werner state admits a local realistic model [7].

From the symmetry of the set $\mathcal{C}$, we conclude that there are three other valid extreme points at (b_*,a_*), $(\frac{1}{2}-a_*,\frac{1}{2}-b_*)$, and $(\frac{1}{2}-b_*,\frac{1}{2}-a_*)$. As well, the function E is constant along the line $b=a-a_*$, which joins the extreme points (a_*,b_*) and $(\frac{1}{2}-b_*,\frac{1}{2}-a_*)$ [20]. Finally, there cannot be any extreme points in the region $b<a-a_*$, since in this region $E(a,b)>E(a_*,b_*)=E^{\max}$. By symmetry, this holds as well for the region $b>a+a_*$. Thus, we conclude that $\mathcal{C}$ has exactly the extreme points that have already been listed. Since $I_{BE}(2)|_{(0,0)}=0$, $I_{BE}^{max}(2)$ is therefore found to be $I_{BE}(2)|_{(a_*,b_*)}$.

Appendix B: Proof of Proposition-1

In this appendix, we prove Proposition-1, namely that the information loss Δ can be bounded by considering a particular coarse graining. Let us consider conditional probabilities $P(0|j)$ and $P(1|j)$ due to the joint probability $P(i,j)$. We re-label j such that $P(0|j)/P(1|j) \geq P(0|j+1)/P(1|j+1)$ for each j. If $P(0|j)/P(1|j)\geq 1/2$ for all j, then J is defined to be N. Otherwise, there exists a J such that $P(0|J)/P(1|J)\geq 1/2$ and $1/2 > P(0|J+1)/P(1|J+1)$. Let $\tilde{P}(i,j)$ denote the joint probabilities after re-labeling. These joint probabilities can be written as $\tilde{P}(i,j)=\tilde{P}(i|j)\tilde{P}(j)$, where $\tilde{P}(j)$ is a marginal distribution for Bob. We will calculate the mutual information for this $(N+1)$-outcome distribution:

$$\begin{aligned} I(N) &= H(i) - H(i|j) \\ &= H(i) - \sum_{j=0}^{N} H[\tilde{P}(0|j)]\tilde{P}(j), \end{aligned} \tag{B1}$$

where we have written the conditional entropy as a binary entropy function $H[q] \equiv -[q\log_2 q + (1-q)\log_2(1-q)]$.

Now let us describe the prescription for the coarse graining. It is a mapping for j in which all $j \leq J$ are mapped to 0 and the others are mapped to 1. The joint probabilities after the mapping are

$$\begin{aligned} Q(0,0) &= \sum_{j=0}^{J} \tilde{P}(0|j)\tilde{P}(j), \\ Q(1,0) &= \sum_{j=0}^{J} \tilde{P}(1|j)\tilde{P}(j), \\ Q(0,1) &= \sum_{j=J+1}^{N} \tilde{P}(0|j)\tilde{P}(j), \\ Q(1,1) &= \sum_{j=J+1}^{N} \tilde{P}(1|j)\tilde{P}(j). \end{aligned} \tag{B2}$$

Here we can calculate conditional probabilities

$$Q(i|j) = \frac{Q(i,j)}{Q(j)}, \tag{B3}$$

where $Q(j)$ is the marginal distribution for Eve after the coarse graining; that is, $Q(0) = \sum_{j=0}^{J} \tilde{P}(j)$ and $Q(1) = \sum_{j=J+1}^{N} \tilde{P}(j)$. Now we are ready to get

$$\begin{aligned} I(2) &= H(i) - H(i|j) \\ = H(i) &- \{H[Q(0|0)]Q(0) + H[Q(0|1)]Q(1)\}. \end{aligned} \tag{B4}$$

From Eqs. (B1) and (B4), we get

$$\begin{aligned} \Delta &= I(N) - I(2) \\ &= \{H[Q(0|0)] - \sum_{j=0}^{J} H[\tilde{P}(0|j)]q_j\}Q(0) \\ &\quad + \{H[Q(0|1)] - \sum_{j=J+1}^{N} H[\tilde{P}(0|j)]r_j\}Q(1), \end{aligned} \tag{B5}$$

where $q_j \equiv \tilde{P}(j)/Q(0)$ and $r_j \equiv \tilde{P}(j)/Q(1)$, which have the properties $\sum_{j=0}^{J} q_j = 1$ and $\sum_{j=J+1}^{N} r_j = 1$. We set $\tilde{P}(0|j) \equiv m_j$. Let us estimate the first quantity in Eq. (B5). By concavity of H and Eq. (B3), it is clear that $\mu \equiv H[Q(0|0)] - \sum_{j=0}^{J} H[\tilde{P}(0|j)]q_j = H[\sum_{j=0}^{J} m_j q_j] - \sum_{j=0}^{J} H[m_j]q_j \geq 0$. Let us introduce $g_0(x) = 2x$. Then

$$\begin{aligned} \mu &= H[\sum_{j=0}^{J} m_j q_j] - \sum_{j=0}^{J} H[m_j]q_j \\ &+ \{-g_0[\sum_{j=0}^{J} m_j q_j] + \sum_{j=0}^{J} g_0[m_j]q_j\} \\ &= H[\bar{m}_0] - g_0[\bar{m}_0] + \sum_{j=0}^{J}\{-H[m_j] + g_0[m_j]\}q_j, \\ &\leq H[\bar{m}_0] - g_0[\bar{m}_0] \\ &\leq \max_{0\leq x\leq \frac{1}{2}} \{H[x] - g_0[x]\} \equiv \chi \simeq 0.322. \end{aligned} \tag{B6}$$

We have used $\sum_{j=0}^{J} m_j q_j \equiv \bar{m}_0$, the linearity of $g_0(x)$, and the bound $-H[m_j] + g_0[m_j] \leq 0$ (which can be seen considering their graphs). Similarly, by introducing $g_1(x) = -2x + 2$ and $\sum_{j=J}^{N} m_j r_j \equiv \bar{x}_1$, we can estimate the second quantity in Eq. (B5) which turns out to be the same form as the first one.

By Eq. (B5) and these results, we get

$$\Delta \leq \chi Q(0) + \chi Q(1) = \chi. \tag{B7}$$

□

[1] D. Bohm and B. Hiley, *The Undivided Universe*, (Routledge, London, UK, 1993); introduced in Ref. [2].

[2] J. S. Bell, *Speakable and Unspeakable in Quantum Mechanics*, (Cambridge University Press, Cambridge, UK, 1987).

[3] J. S. Bell, Physics **1**, 195 (1964), reprinted in Ref. [2].

[4] M. A. Nielsen and I. L. Chuang, *Quantum Computation and Quantum Information*, (Cambridge Univ. Press, Cambridge, U.K., 2000.)

[5] J. Barrett, L. Hardy, and A. Kent, Phys. Rev. Lett. **95**, 010503 (2005).

[6] A. Acín, N. Gisin, and L. Masanes, Phys. Rev. Lett. **97**,

010503 (2006).

[7] A. Acín, S. Massar, and S. Pironio, New J. Phys. **8**, 126 (2006).

[8] C. H. Bennett and G. Brassard, *Proc. IEEE Int. Conf. on Computers, Systems, and Signal Processing, Bangalore* (IEEE, New York, 1984), p.175.

[9] W.-Y. Hwang, Phys. Rev. Lett. **91**, 057901 (2003).

[10] X. Ma, T. Moroder, and N. Lütkenhaus, quant-ph/0812.4301.

[11] H.-K. Lo, M. Curty, and B. Qi, quant-ph/1109.1473.

[12] J. Barrett, N. Linden, S. Massar, S. Pironio, S. Popescu, and D. Roberts, Phys. Rev. A **71**, 022101 (2005).

[13] N. S. Jones and L. Masanes, Phys. Rev. A **72**, 052312 (2005).

[14] With respect to physical implementation, the protocol is almost the same as the Ekert protocol [15]. However, because security is analyzed with a different, though related, point of view, we give a new name.

[15] A. K. Ekert, Phys. Rev. Lett. **67**, 661 (1991).

[16] I. Csiszár and J. Körner, IEEE Trans. Inf. Theory **24**, 339 (1978).

[17] M. Pawlowski, Phys. Rev. A **82**, 032313 (2010).

[18] W.-Y. Hwang and O. Gittsovich, to appear in PRA.

[19] T. M. Cover and J. A. Thomas, *Elements of Information Theory*, (John Wiley and Sons, Inc., 1991).

[20] Since E is constant on this line, it is possible that a linear program would numerically find the maximum not at the extreme points, but somewhere else along this line. For us, this was not a problem, since it is easily verified that the point (a_*, b_*) is extremal. In general, to avoid misidentifying extreme points, one should check the feasibility of other points where E is equal to the found maximum.